polyclar™ brewbrite granules wort clarifier and beer stabilizer



product and application Information

Polyclar™ Brewbrite Granules are a highly effective proprietary product that protects against the development of chill haze and permanent haze while simultaneously clarifying wort.

Polyclar[®] Brewbrite Granules wort clarifier and beer stabilizer is an optimized composition of purified foodgrade kappa carrageenan and specially modified polyvinylpolypyrrolidone (PVPP).

Non-biological haze formation results primarily from the hydrogen bonding between haze-producing proteins and the polyphenol constituents of beer:

Nonmicrobiological products (NMPs) act as templates on which these protein-polyphenol complexes may attach, thereby accelerating haze development in beer

To achieve colloidal stability in beer, it is necessary to reduce these protein-polyphenol complexes, or prevent them from forming.

features and benefits

Polyclar™ Brewbrite Granules wort clarifier and beer stabilizer represents a significant development in preserving the quality and character of beer after packaging. It offers the following benefits:

- upstream wort clarification and beer stabilization with a single addition of the product to the wort
- o protection against chill haze and permanent haze
- o improved beer colloidal stability
- improved fermentation characteristics
- o increased wort collection
- no specialized equipment required (i.e., slurry tanks, dosing pumps)
- o removed with the trub
- o longer filter run lengths
- o no labeling required
- excellent technical service from dedicated industry specialists



methods of use

The advantage of Polyclar[™] Brewbrite Granules is that they can be added directly to the kettle. Dispersion is achieved by the vigorous boiling action in the kettle and during recirculation in the whirlpool.

Polyclar™ Brewbrite Granules do not need to be hydrated in water before they are added to the kettle. The Polyclar™ Brewbrite Granules are added to wort 5-15 minutes before the end of boil.

We recommend no hop additions to the kettle within 5 minutes of Polyclar™ Brewbrite Granules addition. If this is a normal hop addition time, you can add the Polyclar™ Brewbrite Granules earlier, wait 5 minutes, and then add your hops.

advantage of Polyclar™ brewbrite granules

- o low dust
- easy handling
- o direct kettle addition
- 100% active ingredients, no fillers
- o reduces cost, fewer steps and less overall waste
- improved efficiency, reduced chance of poorly hydrated Brewbrite







about PVPP

Polyvinylpolypyrrolidone, or crosslinked PVP, is a synthetic polymer that specifically binds to haze-producing polyphenols. PVPP has a long history of use and is regarded as the method of choice for the colloidal stabilization of beer.

about kappa carrageenan

Kappa carrageenan, a hydrocolloid extracted from red seaweed, is very effective at reducing the size of NMPs in wort; these comprise protein, polyphenol, polysaccharide and other materials. Kappa carrageenan is a polymer composed of galactose and galactose sulfate monomers.

Polyclar Brewbrite Granules wort clarifier and beer stabilizer has a dramatic effect on wort clarity.

dosage rate optimization

The exact amount of Polyclar™ Brewbrite Granules wort clarifier and beer stabilizer required would depend upon the brewing raw materials used, process conditions and the shelf life requirement.

The typical addition rate will be between 10 and 20 g/hl (usually 15 g/hl).

The optimized addition rate can be determined by a simple laboratory testing procedure:

- 1. Collect a wort sample about 10 minutes before the end of the boil.
- 2. Transfer 500 ml samples of the hot wort into 5 x 500 ml bottles.
- 3. Add 10, 15, 20 and 25 g/hl of Polyclar™ Brewbrite Granules wort clarifier and beer stabilizer to the 500 ml samples. (The control is untreated)
- 4. Mix by swirling and allow to settle for 10 minutes.
- 5. Decant part of the clear hot wort into 100 ml glass measuring cylinders, stopper and leave to stand for 60 minutes. Gently stir the column and allow to settle for 15 minutes — assess the clarity and sediment — HOT BREAK.
- **6.** Cool the measuring cylinders by immersing in cold water for 2 hours.
- Remove the cylinders from water bath and assess the clarity of the wort and COLD BREAK sediment volume.
- **8.** The target is to achieve a bright wort, with a compact sediment.



Polyclar™ Brewbrite Granules (penny for scale)



Polyclar Brewbrite Granules (left) and powdered product (right) added directly to liquid.



Polyclar" Brewbrite Granules (left) and powdered product (right) in liquid, highlighting dispersability after direct application.


Polyclar¹⁰ Brewbrite Granules, if added directly to the kettle without hydration, contains lower dust and disperses more easily than powered product.

process assessment

The performance of Polyclar™ Brewbrite Granules wort clarifier and beer stabilizer can also be assessed in process samples by evaluating:


- hot break: collect 1 liter of wort at cast into a graduated cylinder and let stand for 60 minutes assess wort clarity and sediment appearance
- cold break: collect 1 liter of wort from the cold side of the wort chiller into a graduated cylinder and let stand for 12 to 18 hours—assess wort clarity and sediment.
- wort collection: the volume of wort collected after run-off from the whirlpool should be measured
- wort tannoids: measure wort tannoids before
 Polyclar™ Brewbrite Granules wort clarifier and beer
 stabilizer addition and in samples from the wort
 chiller—compare against a control wort
- total polyphenol content can also be measured using a spectrometer, but is less specific for haze polyphenols than tannoid measurement

reduction in tannoids



Polyclar Brewbrite Granules wort clarifier and beer stabilizer dramatically reduced haze-producing tannoids at low addition rates.

faster fermentation



The use of Polyclar Brewbrite Granules wort clarifier and beer stabilizer reduced the time to final gravity by 10%. Actual results may be higher or lower based on brewery process and equipment.

fermentation and beer stabilization

PolyclarTM Brewbrite Granules wort clarifier and beer stabilizer may also benefit yeast growth during fermentation by adsorbing inhibitory materials from the wort. This can be determined by:

- monitoring wort gravity and cell numbers during primary fermentation.
- measuring the ethanol concentration in the green beer.

The efficacy of beer stabilization can be assessed by:

- heat-forcing tests on the packaged beer.
- o tannoid measurement in packaged beer.
- Other procedures such as the use of the PT-Standard Nephelometer.

quality, safety and service

Polyclar™ stabilizer products are manufactured to internationally recognized quality standards. Details are available upon request.

regulatory

PVPP is permitted for use in beverages in all countries with regulations covering the use of additives and process aids. Always seek guidance from your local regulatory authorities.

safety

Safety Data Sheets are available upon request.


technical support

Technical support for Ashland's beverage product portfolio is provided by a team of dedicated industry specialists, from locations in Europe, the U.S. and Asia. For further information on the use of our products, please contact your local Ashland representative or authorized distributor.

Ashland also supplies products and services to the wine, brewing and wider food and beverage industries. We are always solving stability and clarifying challenges to introduce innovative new products to better serve our increasing number of customers in these markets.





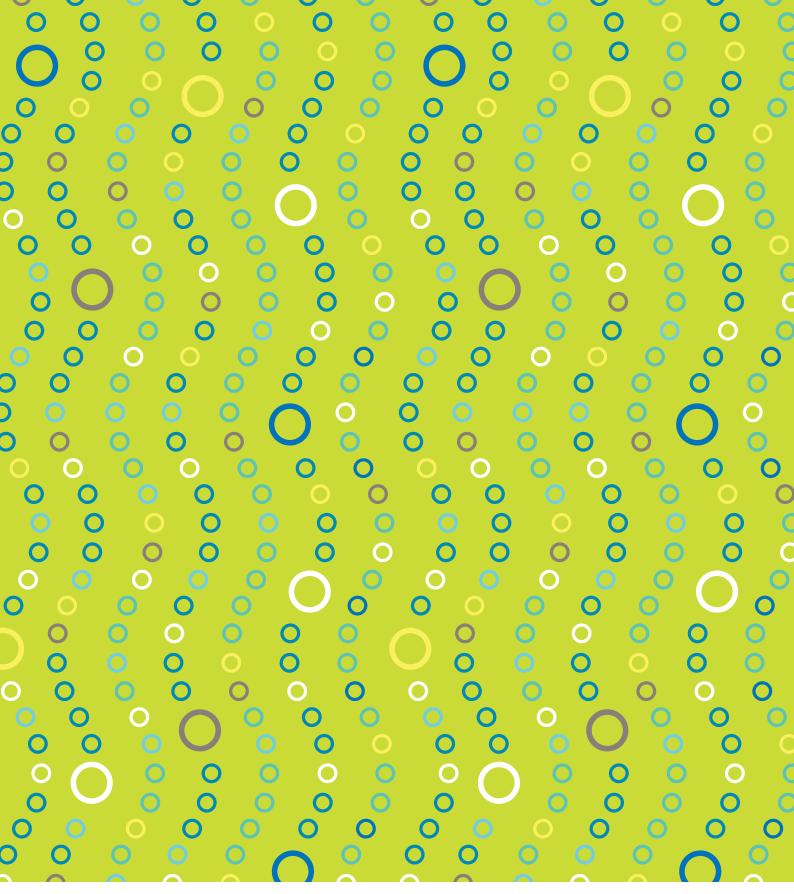

REGIONAL CENTERS

North America — Wilmington, DE USA Tel: +1 877 546 2782

Europe — Switzerland Tel: +41 52 560 55 00

India — Maharashtra Tel: +91 22 61489696

Asia Pacific — Singapore Tel: +65 6775 5366 Middle East, Africa — Istanbul, Turkey Tel: +00 90 216 538 08 00

Latin America — Mexico Tel: +52 55 52 76 6121

ashland.com/contact

- ® Registered trademark, Ashland or its subsidiaries, registered in various countries
- ™Trademark, Ashland or its subsidiaries, registered in various countries
- © 2020, Ashland / HW20-115

The information contained in this brochure and the various products described are intended for use only by persons having technical skill and at their own discretion and risk after they have performed necessary technical investigations, tests and evaluations of the products and their uses. Certain end uses of these products may be regulated pursuant to rules or regulations governing medical devices, drug uses, or pesticidal or antimicrobial uses. It is the end user's responsibility to determine the applicability of such regulations to its products.

All statements, information, and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee of fitness for a particular purpose, or representation, express or implied, for which seller assumes legal responsibility. No freedom to use any patent owned by Ashland, its subsidiaries, or its suppliers is to be inferred.

